


SOLID-2SF-M

Guarding the delivery of sheet fed offset printing machines

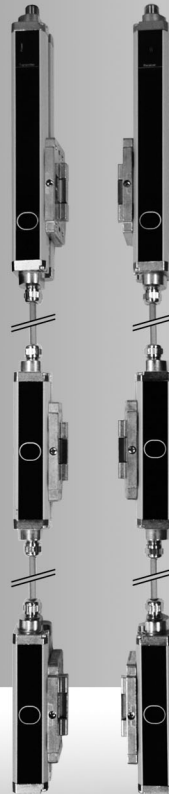

Notes on Connecting and Operating Instructions


This connecting and operating instructions manual contains information on the proper use of SOLID-2SF-M Multiple Light Beam Safety Devices in accordance with its intended purpose. It is included with delivery.




Warning!

All the information contained herein, in particular the safety notes, must be carefully observed.

This connecting and operating instructions manual must be stored carefully. It must be available for the entire operating time of the optical safety device.

Notes regarding safety and warnings are marked by this symbol  .

Notes regarding important pieces of information are marked by the symbol  .

Leuze electronic GmbH + Co. KG is not liable for damage resulting from improper use of its equipment. Familiarity with these instructions is an element of the knowledge required for proper use.

© Reprints and reproduction, in whole or in part, are permitted only with the explicit permission of

Leuze electronic GmbH + Co. KG
In der Braike 1
D-73277 Owen - Teck / Germany
Telefon +49 (0) 7021 / 573-0
Fax +49 (0) 7021 / 573-199
info@leuze.de
www.leuze.com

1	General.....	6
1.1	Certifications	6
1.2	Symbols and terms	7
2	Safety	9
2.1	Approved purpose and foreseeable improper operation.....	9
2.2	Proper use	9
2.2.1	Foreseeable misuse	10
2.3	Competent personnel.....	11
2.4	Responsibility for safety.....	11
2.5	Exemption of liability	11
3	Safety notes.....	12
3.1	The opto-electronic protective device	12
3.2	Transmission channel.....	13
4	Display elements.....	14
4.1	Transmitter status displays	14
4.2	Receiver status displays	15
4.2.1	7-Segment display	16
4.2.2	LED displays	16
5	Installation	17
5.1	Location of the AOPD	17
5.2	Calculating the safety distance	17
5.3	Minimum distance from reflective surfaces.....	18
5.4	Mechanical mounting.....	19
5.5	Mounting types.....	19
5.5.1	Standard mounting.....	19
5.5.2	Mounting with swiveling brackets.....	20
5.5.3	Side mounting	20
6	Electrical connection.....	21
6.1	M12 connection.....	21
6.1.1	Transmitter	21
6.1.2	Testing	22
6.1.3	Receiver.....	23
7	Troubleshooting.....	25
7.1	What should I do if an error occurs?	25
7.2	Diagnostics	25
7.2.1	Transmitter diagnostics	25
7.2.2	Receiver diagnostics	25
7.3	AutoReset	26

8 Technical data 27

8.1 General data 27

8.1.1 Beam data 27

8.1.2 Safety relevant technical data..... 27

8.1.3 General system data..... 27

8.1.4 Transmitter, signal input 28

8.1.5 Receiver, transistor outputs 29

8.2 Dimensions, weights 30

8.2.1 Multiple Light Beam Safety Devices 30

8.2.2 Mounting bracket dimensions 31

9 Order data 33

9.1 Scope of delivery 33

9.2 Order numbers 33

9.3 Accessories 33

10 Tests 35

10.1 Testing before initial operation 35

10.2 Regular tests 35

10.3 Daily testing with the test rod 36

10.4 Checklists 37

10.4.1 Checklist for access guarding 37

10.5 EC Declaration of Conformity 38

1 General

The SOLID-2 SF Multiple Light Beam Safety Devices are optimized for use on sheet delivery on sheet-fed printing machines. This requires defined interruption of beams without a stop being activated. Temporary bridging in accordance with EN 1010 can, for example, be activated by a suitable control unit.

With a suitable control unit, SOLID-2 SF are type 2 Active Optoelectronic Protective Devices (AOPDs) in acc. with EN/IEC 61496-1, EN/IEC 61496-2, PL d in acc. with ISO 13849-1, and comply with SIL 2 in acc. with IEC EN 61508.

All SOLID-2 SF Multiple Light Beam Safety Devices are equipped with integrated cyclical testing and display elements (LEDs and 7-Segment). This is especially convenient when starting a unit up or performing diagnostics.

SOLID-2 SF has the appropriate number of beams via 2-4 SSDs, enabling the definitive assignment of the interruption of individual beams. Each SOLID-2 SF also has a dynamic SSD, which transfers the result of the integrated cyclical testing to the control unit.

The devices of the SOLID-2 SF series are available with up to 4 beams and in various lengths (beam distances), so that they provide an optimum solution for specific applications.

1.1 Certifications

Company



Leuze electronic GmbH & Co. KG in D-73277 Owen - Teck Germany, has a certified quality assurance system in compliance with ISO 9001.

Products



SOLID-2 SF Safety Light Curtains are developed and manufactured in compliance with applicable European directives and international standards.

EC prototype test in accordance with
 EN/IEC 61496 Part 1 and Part 2
 TÜV PRODUCT SERVICE GmbH, IQSE
 Ridlerstrasse 65
 D-80339 Munich

1.2 Symbols and terms

Symbols used







	<p>Warning sign – This symbol indicates possible dangers. Please pay especially close attention to these instructions!</p>
	<p>Sign indicating important information.</p>
	<p>A note, which also refers to a course of action, provides information about special attributes or describes set-up procedures</p>
	<p>Symbols for SOLID-2 SF Transmitter, SD2T General transmitter symbol</p> <p>Transmitter not active Transmitter active</p>
	<p>Symbols for SOLID-2 SF Receiver, SD2R General Receiver symbol</p> <p>The Receiver's active protective field is not free; outputs in OFF state The Receiver's active protective field is free; outputs in ON state The Receiver's active protective field is free; outputs in OFF state</p>
	<p>Signal output Signal input Signal input and/or output</p>

Table 1.1: Symbols

Terms used in this manual

AOPD	Active Opto-electronic Protective Device
AOPD response time	Time between penetration into the active protective field of the AOPD and the actual switching off of the OSSDs.
AutoReset	When an error indication occurs, caused, for example, by faulty external wiring, the AOPD attempts to start again. If the error is no longer present, the AOPD returns to normal operation mode.
Contactors Monitoring (EDM)	Also called "External Device Monitoring", monitors the positive-guided normally closed contacts of downstream relays, contactors or valves
DoubleScan	Two scans are made: Beams must be interrupted in two consecutive scans, before the Receiver switches OFF.
FS	Factory setting
S/RS interlock	Start/restart interlock
Scan	All beams, beginning with the synchronization beam, are activated and deactivated one after the other, i.e. only one beam is active at a time.
SSD1,...,SSD4, Dyn SSD	Safety-relevant switching outputs (transistors)
Start/restart interlock	Prevents automatic start after the supply voltage has been turned on, or after the protective field has been penetrated

Table 1.2: Terms

2 Safety

Before using the safety sensor, a risk evaluation must be performed according to valid standards (e.g. EN ISO 14121, EN ISO 12100-1, ISO 13849-1, IEC 61508, EN 62061). The result of the risk assessment determines the required safety level of the safety sensor (see table 2.1). For mounting, operating and testing, document "SOLID-2SF-M, Optoelectronic delivery guard of sheet-fed printing machines" as well as all applicable national and international standards, regulations, rules and directives must be observed. Relevant and supplied documents must be observed, printed out and handed to the affected personnel.

Before working with the safety sensor, completely read and understand the documents applicable to your task.

In particular, the following national and international legal regulations apply for the start-up, technical inspections and work with safety sensors:

- Machinery directive 2006/42/EC
- Low voltage directive 2006/95/EC
- Electromagnetic compatibility directive 2004/108/EC
- Use of Work Equipment Directive 89/655/EEC supplemented by Directive 95/63 EC
- OSHA 1910 Subpart O
- Safety regulations
- Accident-prevention regulations and safety rules
- Ordinance on Industrial Safety and Health and Labor Protection Act
- Device Safety Act



Notice!

For safety-related information you may also contact the local authorities (e.g., industrial inspectorate, employer's liability insurance association, labor inspectorate, occupational safety and health authority).

2.1 Approved purpose and foreseeable improper operation



Warning!

A running machine can cause severe injuries!

Make certain that, during all conversions, maintenance work and inspections, the system is securely shut down and protected against being restarted again.

2.2 Proper use

The safety sensor must only be used after it has been selected in accordance with the respectively applicable instructions and relevant standards, rules and regulations regarding labor protection and occupational safety, and after it has been installed on the machine, connected, commissioned, and checked by a competent person.

When selecting the safety sensor it must be ensured that its safety-related capability meets or exceeds the required performance level PL_r ascertained in the risk assessment.

Listed in the following table are the safety-related characteristic parameters of the SOLID-2SF-M optoelectronic delivery guard for sheet-fed printing machines.

Type in accordance with IEC/EN 61496	Type 2
SIL in accordance with IEC 61508	SIL 2
SILCL in accordance with IEC/EN 62061	SILCL 2
Performance Level (PL) in accordance with ISO 13849-1: 2008	PL d
Category in accordance with ISO 13849	Cat. 2
Average probability of a failure to danger per hour (PFH _d) For protective field heights up to 900 mm, all resolutions For protective field heights up to 1800 mm, all resolutions For protective field heights up to 2850 mm, all resolutions	8.2 x 10 ⁻⁸ 1/h 8.9 x 10 ⁻⁸ 1/h On request
Service life (T _M)	20 years

Table 2.1: Safety-related characteristic parameters of the SOLID-2SF-M optoelectronic delivery guard of sheet-fed printing machines

- The safety sensor protects persons at access points or at points of operation of machines and plants.
- When mounted vertically at entry points to hazard locations, the safety sensor detects the human body.
- The safety sensor only detects persons upon entry to the danger zone; it does not detect persons who are located within the danger zone. For this reason, a start/restart interlock is mandatory.
- The construction of the safety sensor must not be altered. When manipulating the safety sensor, the protective function is no longer guaranteed. Manipulating the safety sensor also voids all warranty claims against the manufacturer of the safety sensor.
- The safety sensor must be tested regularly by competent personnel.
- The safety sensor must be exchanged after a maximum of 20 years. Repairs or the exchange of parts subject to wear and tear do not extend the service life.

2.2.1 Foreseeable misuse

In principle, the safety sensor is not suitable as a protective device in case of:

- danger of objects being expelled or hot or dangerous liquids spurting from the danger zone
- applications in explosive or easily flammable atmospheres

2.3 Competent personnel

Prerequisites for competent personnel:

- he has a suitable technical education
- he knows the rules and regulations for occupational safety, safety at work and safety technology and can assess the safety of the machine
- he knows the instructions for the safety sensor and the machine
- he has been instructed by the responsible person on the mounting and operation of the machine and of the safety sensor

2.4 Responsibility for safety

Manufacturer and operating company must ensure that the machine and implemented safety sensor function properly and that all affected persons are adequately informed and trained.

The type and content of all imparted information must not lead to unsafe actions by users.

The manufacturer of the machine is responsible for:

- safe machine construction
- safe implementation of the safety sensor
- imparting all relevant information to the operating company
- adhering to all regulations and directives for the safe starting-up of the machine

The company operating the machine is responsible for:

- instructing the operating personnel
- maintaining the safe operation of the machine
- adhering to all regulations and directives for occupational safety and safety at work
- regular testing by competent personnel

2.5 Exemption of liability

Leuze electronic GmbH + Co. KG is not liable in the following cases:


- safety sensor is not used as intended
- safety notices are not adhered to
- reasonably foreseeable misuse is not taken into account
- mounting and electrical connection are not properly performed
- Proper function is not tested (see Chapter 10)
- changes (e.g., constructional) are made to the safety sensor

3 Safety notes

3.1 The opto-electronic protective device

Working principle

SOLID-2 SF consists of a transmitter and a receiver. Beginning with the first beam (synchronization beam) directly after the display panel, the Transmitter pulses beam for beam in rapid sequence. The synchronization between Transmitter and Receiver is performed optically.

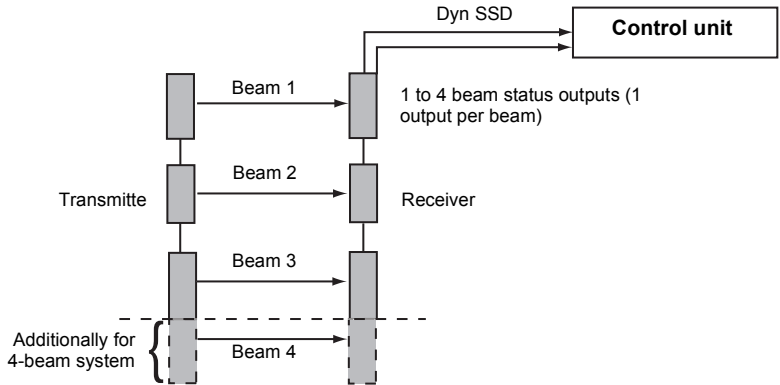

Picture 3.1: Working principle of the opto-electronic protective device

The Receiver recognizes the specially coded pulse packages of the Transmitter beams and opens the corresponding Receiver elements in sequence in the same rhythm. A protective field is consequently formed in the area between Transmitter and Receiver. Its height depends on the geometrical dimensions of the protective device and its width is determined by the distance selected between the Transmitter and Receiver within the permissible range.


The safety output consists of the 1-channel SSDs, which provide the status of the corresponding beams (SSD 1 shows the status of beam 1, SSD 2 the status of beam 2, SSD 3 the status of beam 3 and SSD 4 the status of beam 4), and the Dyn SSD output shared for all beams. When no errors are present on the SOLID-2 SF, this delivers a symmetrical square-wave signal with 300 ms pulse width. This dynamic signal must be monitored by the downstream control unit. If the Dyn SSD signal fails to appear, the power-driven machinery must be switched off. Correct connection must be checked with the machine's first startup!

3.2 Transmission channel

The infrared beams are modulated with specially coded pulse packages so that they are distinct from ambient light, thus ensuring undisturbed operation. Welding sparks or warning flash lights from passing forklifts do not having any effect on the protective field.

If two protective fields are located directly next to each other for two adjacent machines, however, measures must be taken to ensure the optical protective devices do not affect each other.

Another possible way to suppress mutual influence is to switch one of the two protective devices from transmission channel 1 to 2 and therefore to differently formed pulse packages. This solution should be considered when more than two optical protective devices must be arranged next to each other.

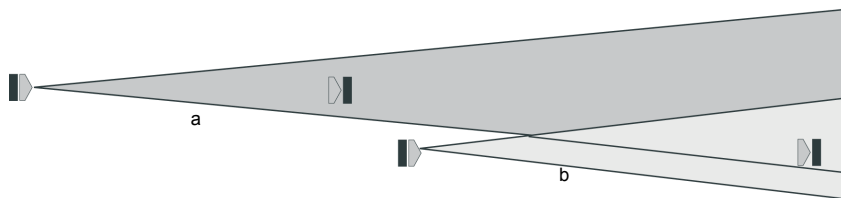

- a AOPD "A" transmission channel 1
- b AOPD "B" transmission channel 2, not affected by AOPD "A"


Picture 3.2: Transmission channel selection (AOPD = Active Opto-electronic Protective Device)

The change from transmission channel 1 to 2 must be made both on the Transmitter and the Receiver of the optical protective device in question. You will find more detailed information in Chapter 6.

4 Display elements

4.1 Transmitter status displays

When the Transmitter's green LED1 is lit, this indicates that the current supply is available.

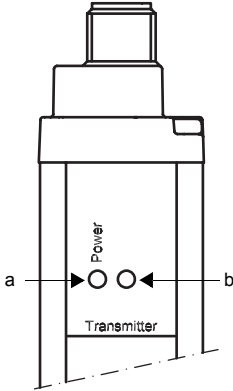

- a LED1 (green/red)
- b LED2 (green/red)

Picture 4.1: Transmitter, LED status displays


Display of the current state of the Transmitter:

Display		Meaning
LED1 green	LED2 off	Operating voltage present, transmission channel 1 selected
LED1 green	LED2 green	Operating voltage present, transmission channel 2 selected
LED1 green	LED2 red	Operating voltage present, transmission channel 1 or transmission channel 2 selected, external test signal activated
LED1 red	LED2 any	Device fault

Table 4.1: Transmitter, LED status displays

4.2 Receiver status displays

LED1 and the 7-Segment display signal the operating states of the Receiver.

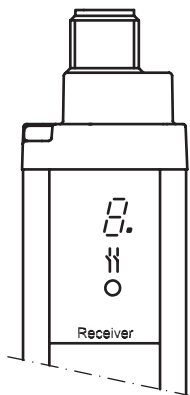

a LED1 = (green/red)

Picture 4.2:Receiver, status displays

4.2.1 7-Segment display

After the supply voltage is switched on, the following data appears on the 7-Segment display of the Receiver:

7-Segment display	Meaning
	Permanent display after startup
1 or 2	Transmission channel TC1 or TC2 display

Table 4.2: Receiver, 7-Segment permanent displays

7-Segment display	Meaning
	Temporary event displays, 1 s per display
E xx	Display of locking status "Malfunction", which can be released by the user; E xx = Error code (see Chapter 9). The display shows E, 3 (1st position) and 0 (2nd position) alternating, and then repeats this sequence.
F xx.	Locking status display "device fault" and an internal fault code. Receiver must be replaced.
1 or 2 flashing	Flashing transmission channel number -> weak signal display, device not adjusted optimally or dirty

Table 4.3: Receiver, 7-Segment temporary event display

4.2.2 LED displays

Receiver, LED status displays

LED	Color	Meaning	
LED1	Red/ green	Red	= At least one safety output SSD in OFF state
		Green	= All safety outputs SSDs in the ON state
		No display	= Device without supply voltage

Table 4.4: Receiver LED displays

5 Installation

5.1 Location of the AOPD

EN 1010-2 specifies the position of the beams on the sheet delivery for sheet-fed printing machines in the following table:

Access height h	Location of the AOPD for the access level(s)		
	Beam 1 ^a	Beam 2 ^b	Beam 3 ^c
$h \leq 1200$ mm	300 mm	If ^d n/a	400 mm below h (h-400)
$1200 \text{ mm} < h \leq 1500$ mm	300 mm	Centered between beams 1 and 3	400 mm below h (h-400)
$h > 1500$ mm	300 mm	700 mm	1100 mm
^a Position measured from access level or from fixed or swiveling platform; because of structural tolerances where installed, the permissible tolerance for the position is ± 35 mm. ^b Beam between beams 1 and 3, if distance between beam 1 and 3 > 500 mm ^c maximum 1100 mm high ^d Some blanking functions require 3 beams for guarding the access side. Where these blanking functions are to be used, with access heights over 1200 mm a third beam that is positioned centered between the top and the bottom beam must be provided.			

Select the suitable SOLID-2 SF type according to the access heights on the sheet delivery (e.g. 2, 3 or 4-beam, see order data) and mount the SOLID-2 SF at the appropriate height.

5.2 Calculating the safety distance

With general applications, i.e. in cases where SOLID-2SF is not used for guarding the sheet delivery of a sheet-fed printing machine, the safety distance must be calculated in acc. with EN 999.

The safety distance is calculated here using the following formula:

$$S = (K \times T) + C$$

S: Safety distance between SOLID-2SF and the danger zone (mm)


K: Approach speed – 1600 mm/s

T: Total time of the delay in seconds, i.e. the total of the response time of the protective device and the downstream control unit or safety interface and the machine's stopping time

C: Additional amount – 850 mm


5.3 Minimum distance from reflective surfaces

Reflective surfaces near opto-electronic protective devices can indirectly deflect beams from the Transmitter into the Receiver. This can cause an object in the protective field not to be detected! All reflective surfaces and objects (material containers, cans, etc.) must therefore be kept at a minimum distance "a" from the protective field. The minimum distance "a" depends on the distance "b" between the Transmitter and the Receiver.

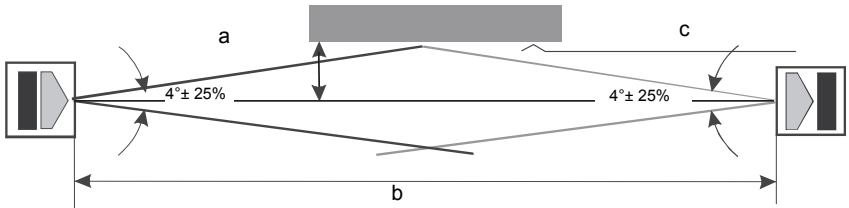

- a = Minimum distance
- b = Protective field width
- c = Reflective surface

Picture 5.1: Minimum distances from reflective surfaces

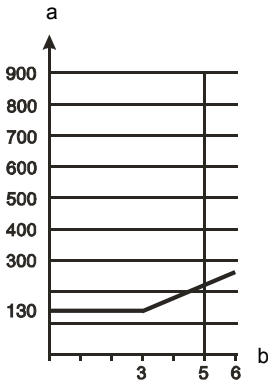

- a = Required distance from reflective surfaces [mm]
- b = Protective field width [m]

Picture 5.2: Minimum distance to reflective surfaces depending on protective field width

5.4 Mechanical mounting


What should generally be taken into consideration during installation?

- Make certain that the Transmitter and Receiver are mounted on even surfaces.
- The Transmitter and Receiver must be positioned at the same height and their connection plugs must be pointing in the same direction.
- Use screws for mounting that can only be loosened with a tool.
- Fasten and secure the Transmitter and Receiver so that they cannot be swiveled or moved. Securing the Transmitter and Receiver so they cannot be moved or swiveled is especially important in the close area with a narrow protective field.
- The safety distance between the protective field and the danger zone must be observed.
- Make sure that access to the danger point/danger zone is only possible through the protective field. Additional access routes must be secured separately (for example by hard guards, additional Safety Light Curtains or doors with locking devices).

5.5 Mounting types

5.5.1 Standard mounting


Straddle brackets (for Transmitter and Receiver) are included with delivery.

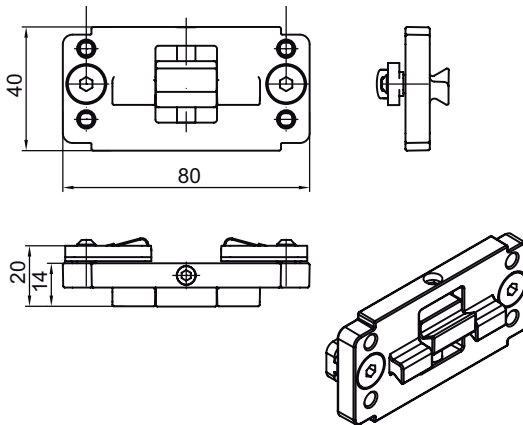

Picture 5.3: Clamping bracket for C-slot mounting

5.5.2 Mounting with swiveling brackets


Swiveling mounting brackets with shock absorbers can be ordered optionally. They are not included with delivery. The swivel range is $\pm 8^\circ$.

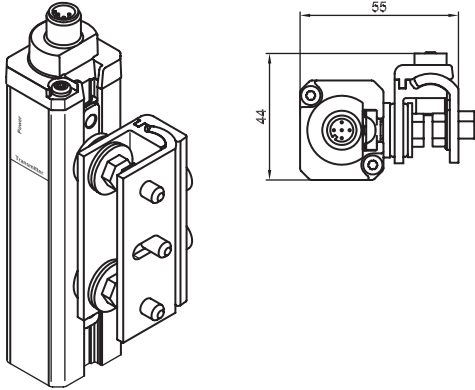

Picture 5.4: Swiveling bracket with shock absorber

5.5.3 Side mounting

Optionally, mounting is possible with mounting brackets and sliding nuts on the side slot. They are not included with delivery.

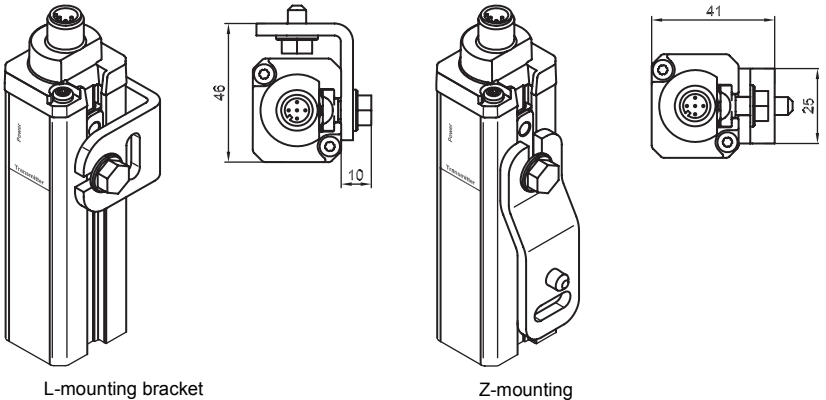

L-mounting bracket

Z-mounting

Picture 5.5: Mounting examples, L-mounting bracket and Z-mounting bracket

6 Electrical connection




- The electrical connection must be performed by experienced personnel. Knowledge of all safety instructions in these connecting and operating instructions is part of this competence.
- The external supply voltage of 24V DC \pm 15 % must guarantee safe isolation from the mains voltage and be able to bridge a power outage period of at least 20 ms. Leuze electronic offers suitable power supplies.
- The power supply must provide at least 1 A current reserve. Transmitter and Receiver must be fused against overcurrent.
- It is vital during the electrical installation that the power of the machine or system to be protected is switched off and locked, so that the dangerous movements cannot be started unintentionally. The protective device may only be connected to the machine after all of its safety functions have been entirely tested.

6.1 M12 connection

Transmitter and Receiver are equipped with M12 plugs. The Transmitter is equipped with a 5-pin plug; the Receiver has an 8-pin plug.

6.1.1 Transmitter



- 1 brown
- 3 blue
- 4 black
- 5 grey

Picture 6.1:SD-2T 5-pin (view of the pins)

Pin	Color	Assignment	Inputs/outputs
1	Brown	⇐ Supply voltage	+24V DC for TC1 or 0V for TC2
2	White		nc
3	Blue	⇐ Supply voltage	0V for TC1 or +24V DC for TC2
4	Black	⇐ Test in	Test input connected to +24V DC → internal test activated to 0V or free → external test activated
5	Grey/Plug housing	⇐ Shield	Functional earth

Table 6.1: Transmitter, connection assignment

The polarity of the power supply from Pin1 and Pin3 determines the selected optical transmission channel. If +24V DC is present on Pin1 and 0V on Pin3, transmission channel 1 is selected. If 0V is present on Pin1 and +24V DC on Pin3, transmission channel 2 is selected.

Be sure to select the same transmission channel for both, for Transmitter and Receiver.



Caution!

For optimum shielding, cables where the shield is routed on the knurled nut of the connecting cable socket must be used (suitable cables are listed under accessories in Chapter 9.3).

6.1.2 Testing



Caution!

In fault-free operation the cyclical internal testing delivers an alternating signal on the Dyn SSD between low and high every 300 ms. Faults found are signaled by a static signal.

The downstream control unit must evaluate the safety-relevant aspects of this signal and activate a machine stop if the signal does not change.

There is also the option of an external testing, with which the SSDs of the Receiver switch off consecutively as a response to the creation of a test signal on the Transmitter. If external testing is required, the Transmitter's test input must be wired accordingly (see below).

In most cases, however, internal cyclical testing is sufficient. For this purpose, the Transmitter's test input must be permanently connected with +24V DC.

Internal cyclical testing

To activate external testing, connect Pin4 of the Transmitter permanently to +24V DC.

When using the internal cyclical testing, the corresponding SSDs and the shared Dyn SSD must always be evaluated for safety relevance by the downstream control unit.

External test signal


To use the external testing option, connect the test output of the corresponding test monitoring unit with Pin4 of the Transmitter. When using the external testing procedure in combination with a test monitoring unit, only the SSDs must to be connected to the test monitoring unit.



Note!


External testing takes precedence over internal testing. If the external test is used, a corresponding frequency of the dangerous movement (typically at least 10 times as frequent) is sufficient to guarantee test frequency.

Test input Pin4, Transmitter:	+24V DC	Test = not activated
	High impedance or 0V	Test = activated

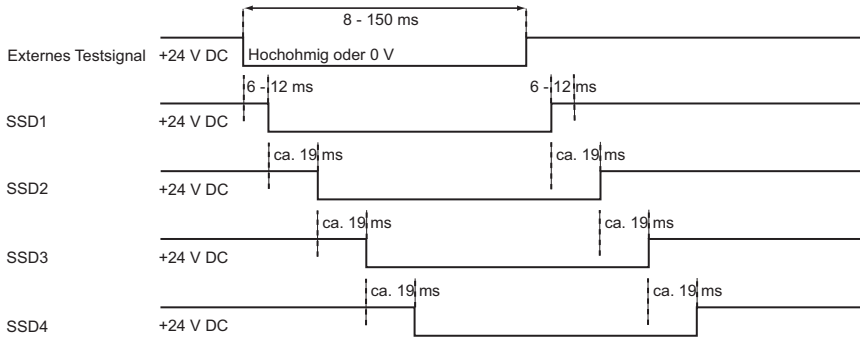

Picture 6.2: SOLID-2SF external testing

6.1.3 Receiver



- 1 white
- 2 brown
- 3 green
- 4 yellow
- 5 grey
- 6 pink
- 7 blue
- 8 black

Picture 6.3: SD-2R 8-pin (view of the pins)

Pin	Color	Assignment		Inputs/outputs
1	White	⇒	Output	SSD4, transistor switching output
2	Brown	⇐	Supply voltage	+24V DC for transmission channel 1 or 0V for transmission channel 2
3	Green	⇒	Output	SSD3, transistor switching output
4	Yellow	⇒	Output	Dyn SSD, transistor switching output
5	Grey	⇒	Output	SSD1, transistor switching output
6	Pink	⇒	Output	SSD2, transistor switching output
7	Blue	⇐	Supply voltage	0V for TC1 or +24V for TC2
8	Black/Plug housing	⇔	Shield	Functional earth

Table 6.2: Receiver, connection assignment

With three-beam receivers SSD4 is switched off; with two-beam SSD3 is also switched off.

Selection of the transmission channel

The polarity of the power supply from Pin2 and Pin7 determines the selected optical transmission channel.

If +24V DC is present on Pin2 and 0V on Pin7, transmission channel 1 is selected. If 0V is present on Pin2 and +24V DC on Pin7, transmission channel 2 is selected.



Note!

Be sure to select the same transmission channel for both, for Transmitter and Receiver.

For optimum shielding, cables where the shield is routed on the knurled nut of the connecting cable socket must be used.

SSD and Dyn SSD switching outputs



Caution!

The safety output consists of the 1-channel SSDs, which provide the status of the corresponding beams, and the Dyn SSD output shared for all beams. When no errors are present, this delivers a symmetrical square-wave signal with 300 ms pulse width. This dynamic signal must be monitored by the downstream control unit. If the Dyn SSD signal remains static, the power-driven machinery must be switched off. Correct connection must be checked with the machine's first startup!

7 Troubleshooting

The following information is used for rapid troubleshooting in the event of a malfunction.

7.1 What should I do if an error occurs?

If the AOPD shows an error on the display, the machine must be stopped immediately and checked by an experienced technician. If it is determined that the error cannot be clearly defined and remedied, your local Leuze office and or the Leuze electronic hotline can assist.

7.2 Diagnostics

Operational malfunctions often have simple causes that you can remedy yourself. The following tables will help you do this.

7.2.1 Transmitter diagnostics

LED display	Measure to eliminate error
LED1 is not lit	Check + 24V supply voltage and connecting cable, replace Transmitter if necessary
LED1 is lit red continuously	Check the test input, hardware fault, replace Transmitter if necessary

Table 7.1: Transmitter diagnostics

7.2.2 Receiver diagnostics

The Receiver distinguishes between error codes (E xx) and fault codes (F xx). Only error messages (E) provide information about events or states that you can eliminate. If the Receiver shows a fault code (F), it must be replaced. Consequently, only error codes (E) are shown in the table below:

Code	Cause/meaning	Measure to eliminate error
	LEDs and 7-Segment displays are not lit	Check the + 24 V DC supply voltage and the connecting cable; replace Receiver if necessary
8	Is constantly lit/hardware fault	Replace Receiver
F xx	Internal hardware fault	Replace Receiver
E 00	Source of failure in the ambient area	Eliminate the source of the failure
E 01	Cross connection between two SSDs or between SSD and Dyn SSD	Eliminate cross connection

Code	Cause/meaning	Measure to eliminate error
E 06	Short circuit of an SSD against GND or cross connection between two SSDs or between SSD and Dyn SSD	Eliminate cross connection
E 07	Short circuit of an SSD against +24V DC or cross connection between two SSDs or between SSD and Dyn SSD	Eliminate cross connection
E 14	Power supply undervoltage	Check/replace power supply or load
E 18	Test time-limit exceeded	Test time > 150 ms; check external test
E 22	Power supply cable overvoltage	Check power supply/load

Table 7.2: Receiver diagnostics

7.3 AutoReset

After an error or a fault has been detected and displayed, an automatic restart occurs within

- about 2 seconds for the Transmitter
- about 20 seconds for the Receiver

for the device in question. If the error or fault is then no longer present, the machine or system can be started again.

8 Technical data

8.1 General data

8.1.1 Beam data

Range		Number of beams		Beam distances	
Min.	Max.	Min.	Max.	Min.	Max.
0.25 m	6 m	2	4	200	400

Table 8.1: Beam data

8.1.2 Safety relevant technical data

Type in accordance with IEC/EN 61496	Type 2
SIL in accordance with IEC 61508	SIL 2
SILCL in accordance with IEC/EN 62061	SILCL 2
Performance Level (PL) in accordance with ISO 13849-1: 2008	PL d
Category in accordance with ISO 13849	Cat. 2
Average probability of a failure to danger per hour (PFH _d) For protective field heights up to 900 mm, all resolutions For protective field heights up to 1800 mm, all resolutions For protective field heights up to 2850 mm, all resolutions	8.2 x 10 ⁻⁸ 1/h 8.9 x 10 ⁻⁸ 1/h On request
Service life (T _M)	20 years

8.1.3 General system data

Safety category	Type 2 in acc. with EN IEC 61496; SIL2 in acc. with IEC 61508
Supply voltage U _v Transmitter and Receiver	24V DC, ± 15 %, external power supply with secure mains supply isolation and equalization for a 20 ms power outage, minimum 1 A current reserve
Residual ripple of supply voltage	± 5 % within U _v limits
Transmitter power consumption	45 mA
Receiver power consumption	80 mA without external load
Shared value for external fuse in the supply line for Transmitter and Receiver	1A

Permissible wire cross-section: Transmitter Receiver	0.14 mm ² 0.14 mm ²
Transmitter: Class: Wave length: Pulse duration: Pulse pause: Power:	Light-emitting diodes in acc. with EN 60825-1:1994+ A1:2002+A2001: 1 950 nm 7 µs 3.1 ms < 10µW
Synchronization	Optical between Transmitter and Receiver
Test repetition time for integrated cyclical test	300 ms
Safety class (VDE 106)	III ^{*)}
Type of protection	IP 65
Ambient temperature, operation	0 ... 50 °C
Ambient temperature, storage	-25 ... 70 °C
Relative humidity	15 ... 95 %

*) The circuits connected to the inputs and outputs must maintain the clearance distances for safe isolation in the relevant standards

Table 8.2: General system data

8.1.4 Transmitter, signal input

Test input	Input: Contact or transistor against +24V DC current load: 20 mA max.
------------	---

Table 8.3: Transmitter, signal input

8.1.5 Receiver, transistor outputs

Dyn SSD/SSD, transistor outputs	5 safety pnp transistor outputs, short circuit-proof		
	Minimum	Typical	Maximum
Low switching voltage (beam not interrupted) Switching current Load capacity			GND+ 15 VDC 35 mA < 30nF
Permissible wire resistance for load	-	-	< 50 Ω*)
Permissible wire cross-section: Receiver			0.14 mm ²
Permissible cable length between Receiver and load	-	-	100 m
Auxiliary pulse width	-	<40 μs	-
Auxiliary pulse spacing Channel 1 Channel 2	-	6.5 ms 6.2 ms	-
SSD restart time after beam interruption	-	100 ms	-
SSD response time Beams 1-3 Beam 4 (if available)		130 ms 30 ms	34 ms
Dyn SSD switching frequency	3.3 Hz (300 ms pulse width)+/- 10%		
Dyn SSD signal delay after switching on/autoreset	3 sec		


*) Note the additional restrictions caused by cable length and load current.

Table 8.4: Receiver, transistor outputs


8.2 Dimensions, weights

8.2.1 Multiple Light Beam Safety Devices


2-beam:

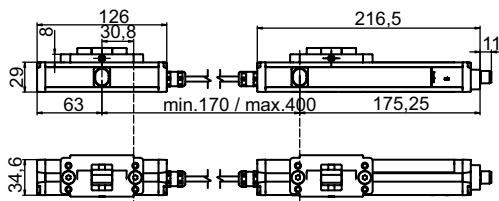


3-beam:

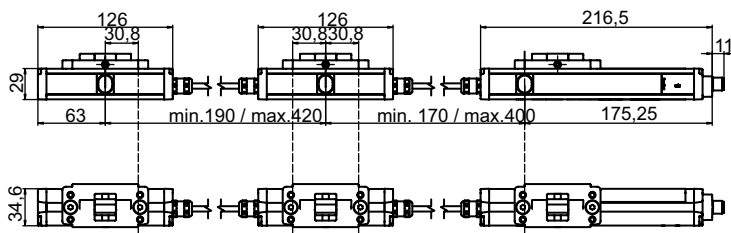


4-beam:

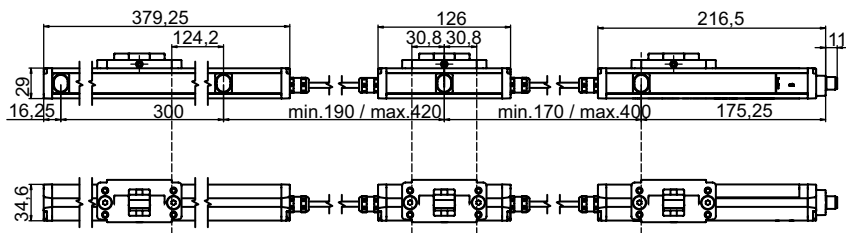


8.2.2 Mounting bracket dimensions

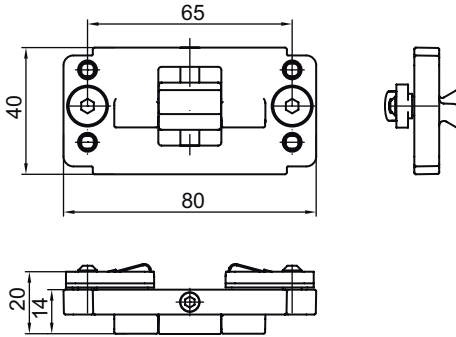


Picture 8.1: Clamping bracket for C-slot mounting

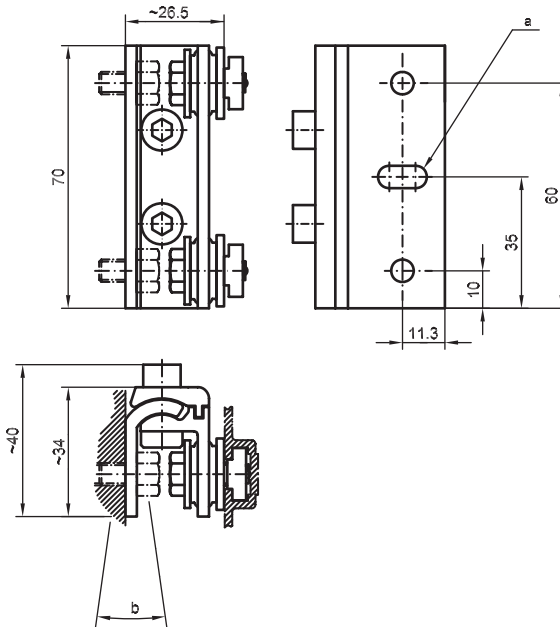

Picture 8.2: Option: Swiveling mounting bracket with shock absorber

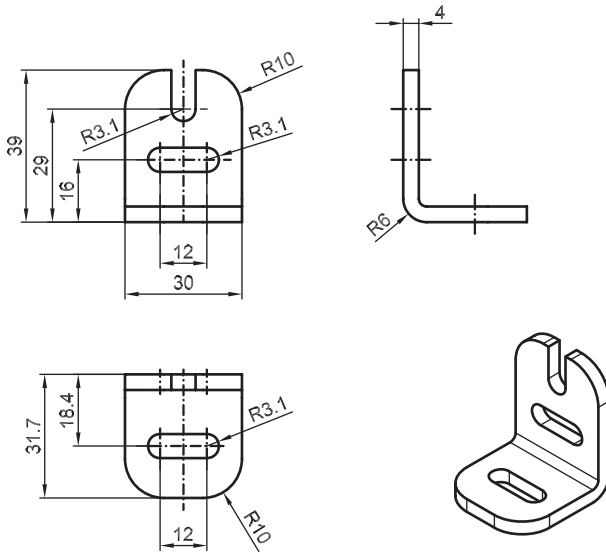

Picture 8.3:Option: L-mounting bracket

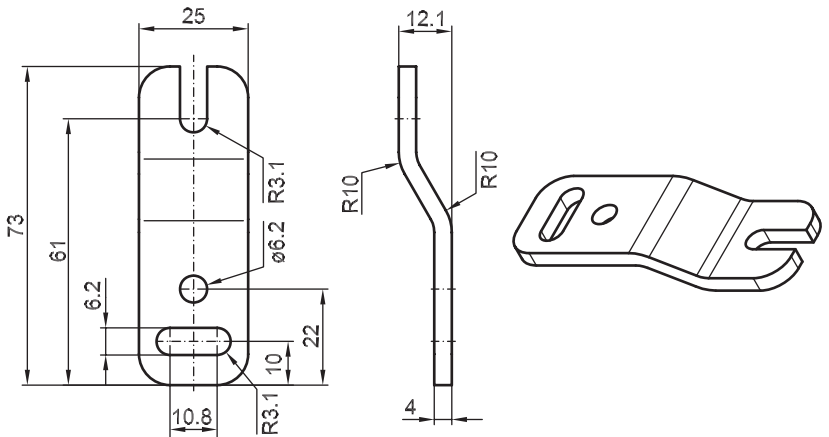

Picture 8.4:Option: Z-mounting bracket

9 Order data

9.1 Scope of delivery

SOLID2-SF-M Multiple Light Beam Safety Devices are delivered with:

- 1SD2Txy Transmitter Unit
- 1 SD2Rxy Receiver Unit
- 4 to 6 BT-P40 clamping brackets (depending on number of beams)
- 1 connecting and operating instructions manual

9.2 Order numbers

Article no.	Name	Transmitter/Receiver	Number of beams
67822280	SD2T-2	Transmitter	2
67822281	SD2R-2-5N	Receiver	2
67822282	SD2T-3	Transmitter	3
67822283	SD2R-3-5N	Receiver	3
67822284	SD2T-4	Transmitter	4
67822285	SD2R-4-5N	Receiver	4

9.3 Accessories

Article no.	Article	Name
424416	BT-P40	Clamping bracket for C-slot
429050	BT-360°	360° mounting bracket for SOLID-2
429055	BT-360°-SET	360° mounting set, consisting of 2 BT-360° mounting brackets
429051	BT-L	L-mounting bracket
429052	BT-Z	Z-mounting bracket
429056	BT-L bracket set	Mounting set
429057	BT-Z mounting set	Mounting set
560300	BT-SSD	Mounting bracket, swiveling with shock absorber
429058	BT-SSD/2er-SET	BT-SSD mounting set, consisting of 2 BT-SSD
429059	BT-SSD/4er-SET	BT-SSD mounting set, consisting of 4 BT-SSD
429049	BT-SSD-270/2er-SET	BT-SSD-270 mounting set, consisting of 2 mounting brackets BT-SSD-270

Article no.	Article	Name
Connecting cable, 5-pin for Transmitter		
429070	CB-M12-500S-5WF	Connecting cable shielded with M12 connection, angled, length 0.5 m
429071	CB-M12-5000S-5GF	Connecting cable shielded with M12 connection, straight, length 5 m
429072	CB-M12-5000S-5WF	Connecting cable shielded with M12 connection, angled, length 5 m
429073	CB-M12-10000S-5GF	Connecting cable shielded with M12 connection, straight, length 10 m
429074	CB-M12-10000S-5WF	Connecting cable shielded with M12 connection, angled, length 10 m
429075	CB-M12-15000S-5GF	Connecting cable shielded with M12 connection, straight, length 15 m
429076	CB-M12-15000S-5WF	Connecting cable shielded with M12 connection, angled, length 15 m
Connecting cable, 8-pin for Receiver		
429080	CB-M12-500S-8WF	Connecting cable shielded with M12 connection, angled, length 0.5 m
429081	CB-M12-5000S-8GF	Connecting cable shielded with M12 connection, straight, length 5 m
429082	CB-M12-5000S-8WF	Connecting cable shielded with M12 connection, angled, length 5 m
429083	CB-M12-10000S-8GF	Connecting cable shielded with M12 connection, straight, length 10 m
429084	CB-M12-10000S-8WF	Connecting cable shielded with M12 connection, angled, length 10 m
429085	CB-M12-15000S-8GF	Connecting cable shielded with M12 connection, straight, length 15 m
429086	CB-M12-15000S-8WF	Connecting cable shielded with M12 connection, angled, length 15 m

Table 9.1: SOLID-2 SF accessories

10 Tests

10.1 Testing before initial operation

Testing by an experienced technician before startup must ensure that the optical protective device and any other safety components that might be present have been selected in accordance with the required specifications, especially the European Machine and Machine Utilization Directives, and that they provide the necessary protection when properly operated.

- ↳ *Use the applicable local regulations, with the help of the checklists provided in the Appendix where required, to check that the protective devices are properly installed, that they are properly wired into the control unit and that they work in all machine operating modes.*
- ↳ *The same testing requirements apply if the machine in question has not been operated for some time and after major modifications or repairs if this could affect the safety of the machine.*
- ↳ *Observe the specifications regarding the instructing of operating personnel by experienced technicians before work is started. The machine owner is responsible for instructing personnel.*

Leuze electronic offers a specialist service which performs the required testing and instruction tasks (www.leuze.de). This service must be ordered separately. The results of these tests are documented for the machine owner in accordance with ISO 9000 ff.

10.2 Regular tests

Regular tests must also be carried out in accordance with local regulations. These are designed to discover changes (e.g. in machine stopping times) or manipulations to the machine controls or protective device.


- ↳ *You must have the effectiveness of the protective device checked by an experienced technician at suitable intervals, but at least once a year.*
- ↳ *The applicable checklist in the Appendix may also be used during regular testing.*

Leuze electronic also provides a specialist service for regular tests.

10.3 Daily testing with the test rod

SOLID-2SF Multiple Light Beam Safety Devices are subjected to cyclical testing. Nevertheless it is very important to check the protective field for its effectiveness every day, so as to ensure that the protection stays effective at every point of the protective field after a parameter or tool change.

Only use an appropriate test rod with \varnothing 30 mm (accessory), and NEVER use your fingers, hand or arm for checking the system!

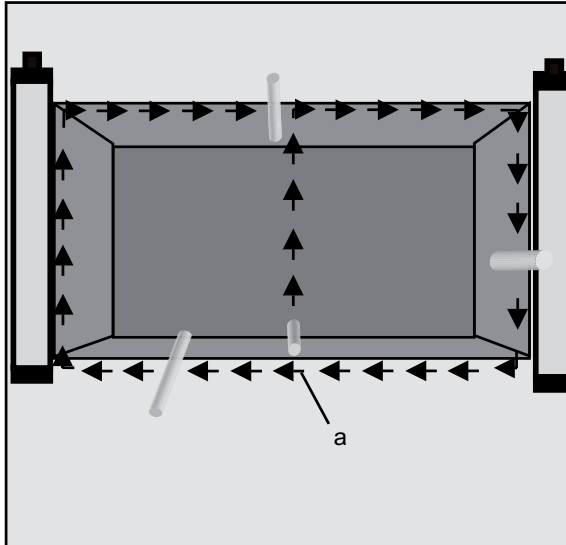

a = Test start

Picture 10.1: Testing the protective field with the test rod

↳ *The LED1 of the Receiver must be observed during the testing procedure. If a beam is interrupted by the test rod, this LED1 must change from "green" to "red".*

10.4 Checklists

The test before startup ensures the safety-related fault-free integration of the active opto-electronic protective device (AOPD) into the machine and its control unit. The results of the test must be written down and kept with the machine documents. They can then be used as a reference during the subsequent regular tests.

10.4.1 Checklist for access guarding



Note!

This checklist is intended as a help tool. It supports but does not replace for the test before startup or the regular tests by an expert.

- Only with general applications, i.e. in cases in which SOLID-2SF is not used for guarding the sheet delivery of a sheet-fed printing machine: Yes No
- Has the safety distance been calculated according to the applicable formula and specifications and is this minimum distance observed between the protective field and the point of operation? Yes No
- Are the required beam heights of the lowest and the highest beam complied with? Yes No
- If access to the point of operation is possible through routes other than the protective field of the AOPD, are the other access options suitably secured by other means? Yes No
- Is the external condition of the protective device and the control devices fault-free? Yes No
- Are Transmitter and Receiver fixed against displacement/turning after the alignment? Yes No
- Are all connectors and connecting cables in fault-free conditions? Yes No
- Is the start/restart button for resetting the AOPD positioned outside the danger zone in line with specifications so that it cannot be reached from the danger zone? Is there a complete overview of the danger area from the start/restart button position? Yes No
- Are the safety-related switching outputs (OSSDs) linked into the downstream machine control unit in accordance with the required safetycategory? Yes No
- Does the actual integration of the AOPD into the machine control unit comply with the circuit diagrams? Yes No
- Does the AOPD respond correctly when any beam* is interrupted and does the system lock (inevitable with activated start/restart interlock as only the access not the presence of a person in the danger zone is detected)? Yes No
- Does the dangerous movement stop immediately if the supply voltage of the AOPD is interrupted and is the start/restart button needed to start the machine again after the supply voltage returns? Yes No

10.5 EC Declaration of Conformity



the sensor people

EG-KONFORMITÄTS-ERKLÄRUNG	EC DECLARATION OF CONFORMITY	DECLARATION CE DE CONFORMITE
Der Hersteller	The Manufacturer	Le constructeur
	Leuze electronic GmbH + Co. KG In der Braike 1, PO Box 1111 73277 Owen, Germany	
erklärt, dass die nachfolgend aufgeführten Produkte den einschlägigen Anforderungen der genannten EG-Richtlinien und Normen entsprechen.	declares that the following listed products fulfil the relevant provisions of the mentioned EC Directives and standards.	déclare que les produits identifiés suivants sont conformes aux directives CE et normes mentionnées.
Produktbeschreibung: Sicherheits- Lichtvorhang Mehrstrahl-Sicherheits- Lichtschranke, Berührunglos wirkende Schutzeinrichtung, Sicherheitsbauteil nach 2006/42/EG SOLID-2SF Seriennummer siehe Typschild	Description of product: Safety Light Curtain Multiple Light Beam Safety Device, Active opto-electronic protective device, safety component in acc. with 2006/42/EC annex IV SOLID-2SF Part No. see name plates	Description de produit: Barrière immatérielle de sécurité Barrage immatériel multifaisceau de sécurité, Équipement de protection électro- sensible, Élément de sécurité selon 2006/42/CE annexe IV SOLID-2SF Art. n° voir plaques signalétiques
Angewandte EG-Richtlinie(n): 2006/42/EG 2004/108/EG	Applied EC Directive(s): 2006/42/EC 2004/108/EC	Directive(s) CE appliquées: 2006/42/CE 2004/108/CE
Angewandte Normen: EN 61496-1:2009; IEC 61496-2:2006 ; IEC 61508:1998 Part 1,3,4 (SIL 2); IEC 61508-2:2000 (SIL2) EN 50178:1997; EN ISO 13849-1:2008 (Kat.2, PLd)	Applied standards:	Normes appliquées:
Benannte Stelle / Baumusterprüfbescheinigung:	Notified Body / Certificate of Type Examination:	Organisme notifié / Attestation d'examen CE de type:
TÜV-SÜD PRODUCT SERVICE GmbH Zertifizierungsstelle Ridlerstraße 65 D-80339 München	/	Z10 09 12 22795 085
Bevollmächtigter für die Zusammenstellung der technischen Unterlagen:	Authorized person to compile the technical file:	Personne autorisée à constituer le dossier technique:
Robert Sammer; Leuze electronic GmbH + Co. KG, business unit safety systems Liebigstr. 4; 82256 Fuerstenfeldbruck; Germany		

Owen, *27.11.10*
Datum / Date / Date

H. Grubel
Dr. Harald Grubel, Geschäftsführer / Director / Directeur

Leuze electronic GmbH + Co. KG
In der Braike 1
D-73277 Owen
Telefon +49 (0) 7021 673-0
Telefax +49 (0) 7021 673-199
info@leuze.de
www.leuze.com
LEO-ZQM-149-01-F0

Leuze electronic GmbH + Co. KG, Sitz Owen, Registergericht Stuttgart, HRK 230712
Persönlich haftende Gesellschafterin Leuze electronic Geschäftsbeteiligungs-GmbH,
Sitz Owen, Registergericht Stuttgart, HRB 230550
Geschäftsführer: Dr. Harald Grubel (Vorsitzender), Karsten Just
USt-IdNr: DE 146912621 | Zul Nummer 2554232
Es gelten ausschließlich unsere aktuellen Verkaufs- und Lieferbedingungen
Only our current Terms and Conditions of Sale and Delivery shall apply

Nr. 609030-201004

You can also download this EC Declaration of Conformity from the Internet under:
<http://www.leuze.com/solid-2>